




SHPB 160 / 3200

Standard configuration:

- CNC Delem controller
- heat treatment (annealing) of the machine frame
- big throat depth
- standard movement in three axes Y1, Y2 and X
- high speeds in all axes
- electrical components (Telemechanique, Schneider, ABB, Siemens)
- special protection system Nuova/ Laser safe with multiple laser beams

Controller CNC DELEM DA-66W (optional)



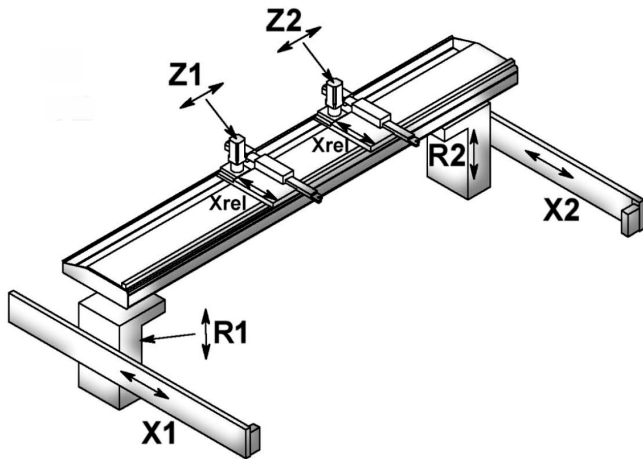

The possible movements of the backgauge (optional).

TYPE SHPB	63/ 2500	63/ 3200	80/ 2500	80/ 3200	100/ 2500	100/ 3200	100/ 4200	120/ 2500	120/ 3200	120/ 4200	160/ 2500	160/ 3200	160/ 4200	160/ 6000
NOMINAL PRESSURE (kN)	630		800		1000			1200			1600			
LENGTH OF WORK TABLE (mm)	2500	3200	2500	3200	2500	3200	4200	2500	3200	4200	2500	3200	4200	6000
DISTANCE BETWEEN UPRIGHTS (mm)	2060	2700	2060	2700	2060	2700	3700	2060	2700	3700	2060	2700	3700	5500
THROAT DEPTH (mm)	300		400											
BACKGAUGE STROKE (mm)	1000													
RAM STROKE (mm)	200													
DIE SETTING HEIGHT (mm)	500													
THICKNESS OF WORK TABLE (mm)	100										120			
WORK TABLE HEIGHT (mm)	800													
MAIN MOTOR POWER (kW)	5,5				7,5						11			
WEIGHT (kg)	5500	7000	5600	7200	5800	8000	9500	5800	8000	9500	6000	10000	12000	14000
OVERALL DIMENSIONS (LxWxH) (mm)	2825	3500	2825	3500	2825	3500	4500	2825	3500	4500	2825	3500	4500	6500
	X	X	X	X	X	X	X	X	X	X	X	X	x	X
	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650
	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	2430	2430	2430	2430	2540	2540	2540	2540	2540	2540	2580	2580	2580	2580

TYPE SHPB	200/ 3200	200/ 4200	200/ 6000	250/ 3200	250/ 4200	250/ 6000	320/ 3200	320/ 4200	320/ 6000	400/ 3200	400/ 4000	400/ 5000	500/ 4000	500/ 5000	500/ 6000
NOMINAL PRESSURE (kN)	2000			2500			3200			4000			5000		
LENGTH OF WORK TABLE (mm)	3200	4200	6000	3200	4200	6000	3200	4200	6000	3200	4000	5000	4000	5000	6000
DISTANCE BETWEEN UPRIGHTS (mm)	2700	4200	5500	2700	3700	5400	2700	3700	5300	2540	3500	4050	3400	4050	5050
THROAT DEPTH (mm)	400														
BACKGAUGE STROKE (mm)	1000														
RAM STROKE (mm)	200														
DIE SETTING HEIGHT (mm)	500														
THICKNESS OF WORK TABLE (mm)	120						200								
WORK TABLE HEIGHT (mm)	800														
MAIN MOTOR POWER (kW)	15						18,5			30			37		
WEIGHT (kg)	11000	13000	15000	15000	16000	18000	18000	22000	24000	27000	30000	33000	41000	43000	45000
OVERALL DIMENSIONS (LxWxH) (mm)	3500	4500	6500	3500	4500	6500	3500	4500	6500	3500	4500	5500	4500	5500	6500
	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	1650	1650	1650	1730	1730	1730	1950	1950	1950	2150	2150	2150	2450	2450	2450
	X	X	X	X	x	X	X	X	X	x	X	X	X	X	X
	2580	2580	2580	2580	2580	2580	2670	2670	2670	3050	3050	3050	4570	4570	4570