




EN-220

TYPE	EN-220
CLAMPING FORCE (t)	220
SCREW DIAMETER (mm))	50 - 55 - 60
INJECTION PRESSURE (kg/cm ²)	1.723 - 1.424 - 1.196
INJECTION RATE (cm ³ /sec)	174 - 211 - 251
MOLD THICKNESS (mm)	200 - 550
PLATEN SIZE (mm)	780x780
OIL TANK CAPACITY (lt)	450
MOTOR POWER (kW)	37,05
WEIGHT (kg)	9200
OVERALL DIMENSIONS (LxWxH) (kg)	6000x1500x2300

EQUIPMENT CHARACTERISTICS

- Super low-pressure mold protection.
- Four energy convertors.
- A big size cooler.
- Bimetallic screw.
- Protection system from current leakage.
- Emergency stop.
- Protection from voltage fluctuations.

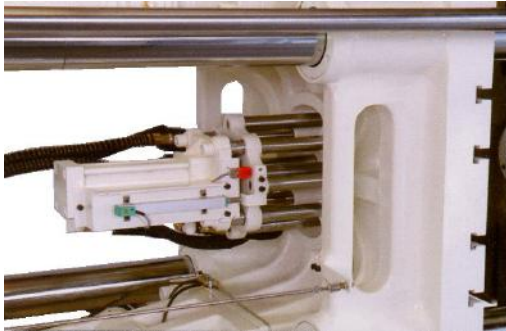



Die protection system



Bimetallic screw head κοχλία



Automatic system for die placement

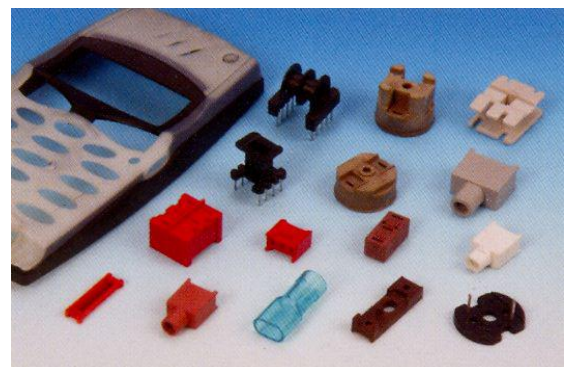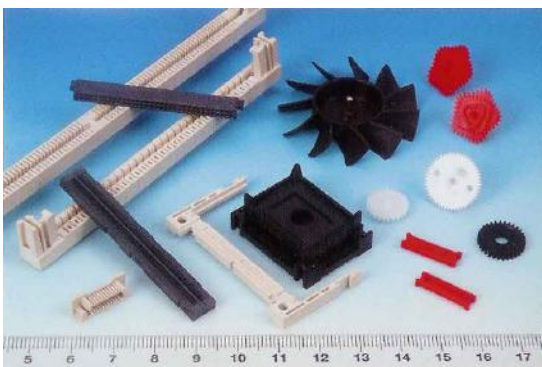

Products manufactured from EN - 220