


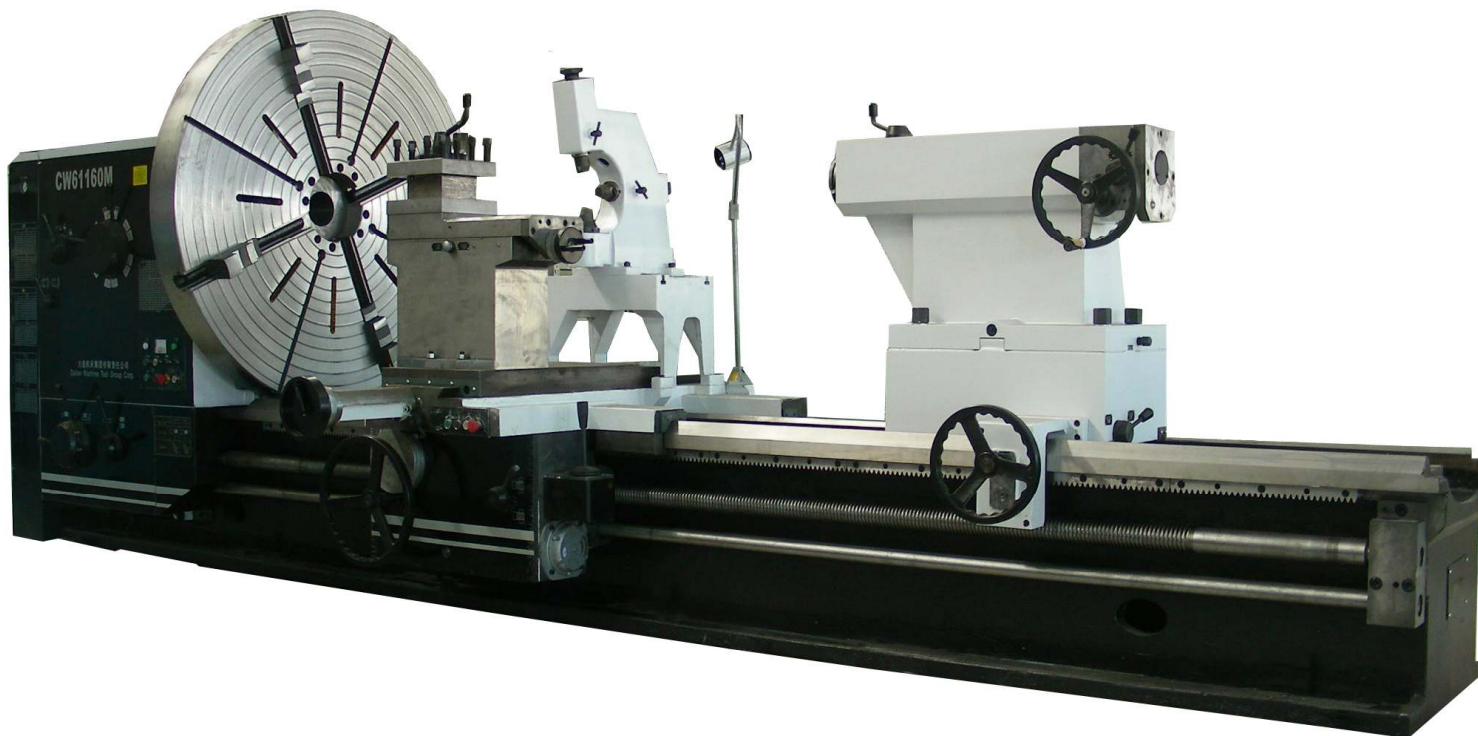

TECHNICAL SPECIFICATIONS	CW61160M
Distance between centers	1,5m - 2m - 3m - 4m - 5m - 6m - 8m
Swing over bed	Ø1.600mm
Swing over gap	Ø2.000mm
Swing over carriage	Ø1.230mm
Width of gap	600mm
Spindle bore	Ø130mm
Taper of spindle bore	Ø130mm / A15
Taper bore of tailstock quill	Morse No.5
Spindle speed	(21 Επιλογές) 3,15-315rpm
Metric thread	1-120mm
Whiteorth thread	1/2-56TPI
Module thread	0,6-60module
Main motor power	22kW
Weight	10tn - 10,5tn - 11,5tn - 12,5tn - 13,5tn - 14,5tn - 17,5tn