

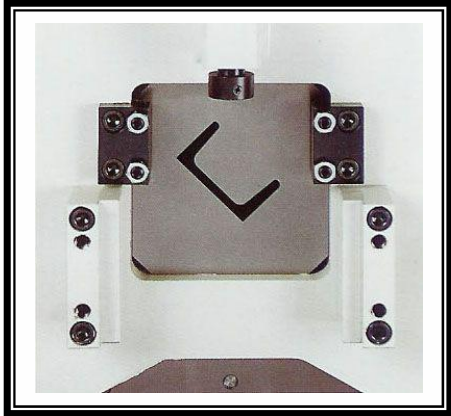
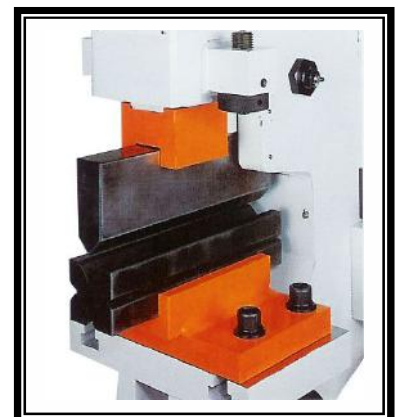


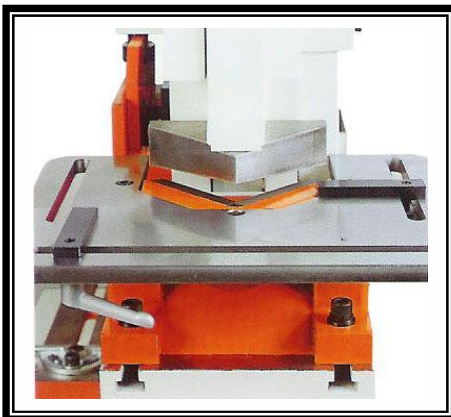

IW 60H

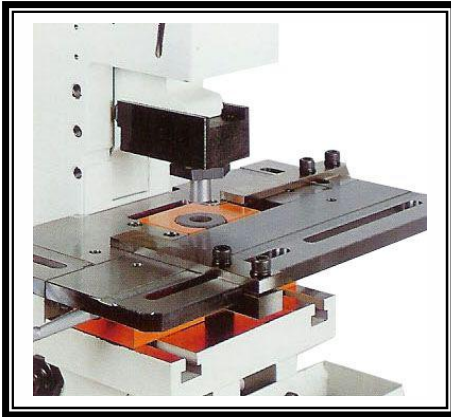

MODEL	IW – 45M	IW – 45K	IW – 50A	IW – 60H	IW – 60K
PUNCHING					
PUNCHING PRESSURE (T)	45		50	60	
PUNCH CAPACITY	Φ22 x 15		Φ20 x 18	Φ28 x 15	Φ22 x 20
DIAMETER x THICKNESS	Φ40 x 8		Φ40 x 9	Φ40 x 11	Φ40 x 11
THROAT DEPTH	175	165	180	220	
MAX STROKE LENGTH (15mm)	31	37	24	29	34
WORKING HEIGHT	970	1050	840	1000	1050
FLAT SHEARING					
FLAT BAR SHEAR	350 x 8	300 x 10	300 x 12	350 x 15	
WIDTH x THICKNESS	180 x 12	-----	200 x 18	210 x 20	250 x 17
BLADE LENGTH	360	310		360	
WORKING HEIGHT	970	800	1150	1006	805
ANGLE SHEARING					
AT 90° SHEARING	80 x 80 x 8	75 x 75 x 6	100 x 100 x 10	100 x 100 x 13	100 x 100 x 8
AT 45° SHEARING	50 x 50 x 6	-----	65 x 65 x 8	80 x 80 x 8	-----
WORKING HEIGHT	1120	1000	850	1236	1070
BAR SHEARING					
ROUND BAR SHEAR	Φ25	Φ30	Φ32	Φ40	Φ40
SQUARE BAR SHEAR	25 x 25		30 x 30	38 x 38	
WORKING HEIGHT	1190	1000	880	1260	1050
NOTCHING					
LENGTH	50,8**	50,8			
WIDTH	90**	90			
THICKNESS	7**	7		8	
MAIN MOTOR (HP)	5			7,5	
DIMENSIONS	1260x700x 1690	1050x760x 1490	1310x770x 1450	1460x770x 1560	1180x760x 1630
WEIGHT	830	840	1130	1500	1180

** OPTIONAL TOOLING